



# MAXX-606


## PATIENT POSITIONING MANUAL LASER SYSTEM

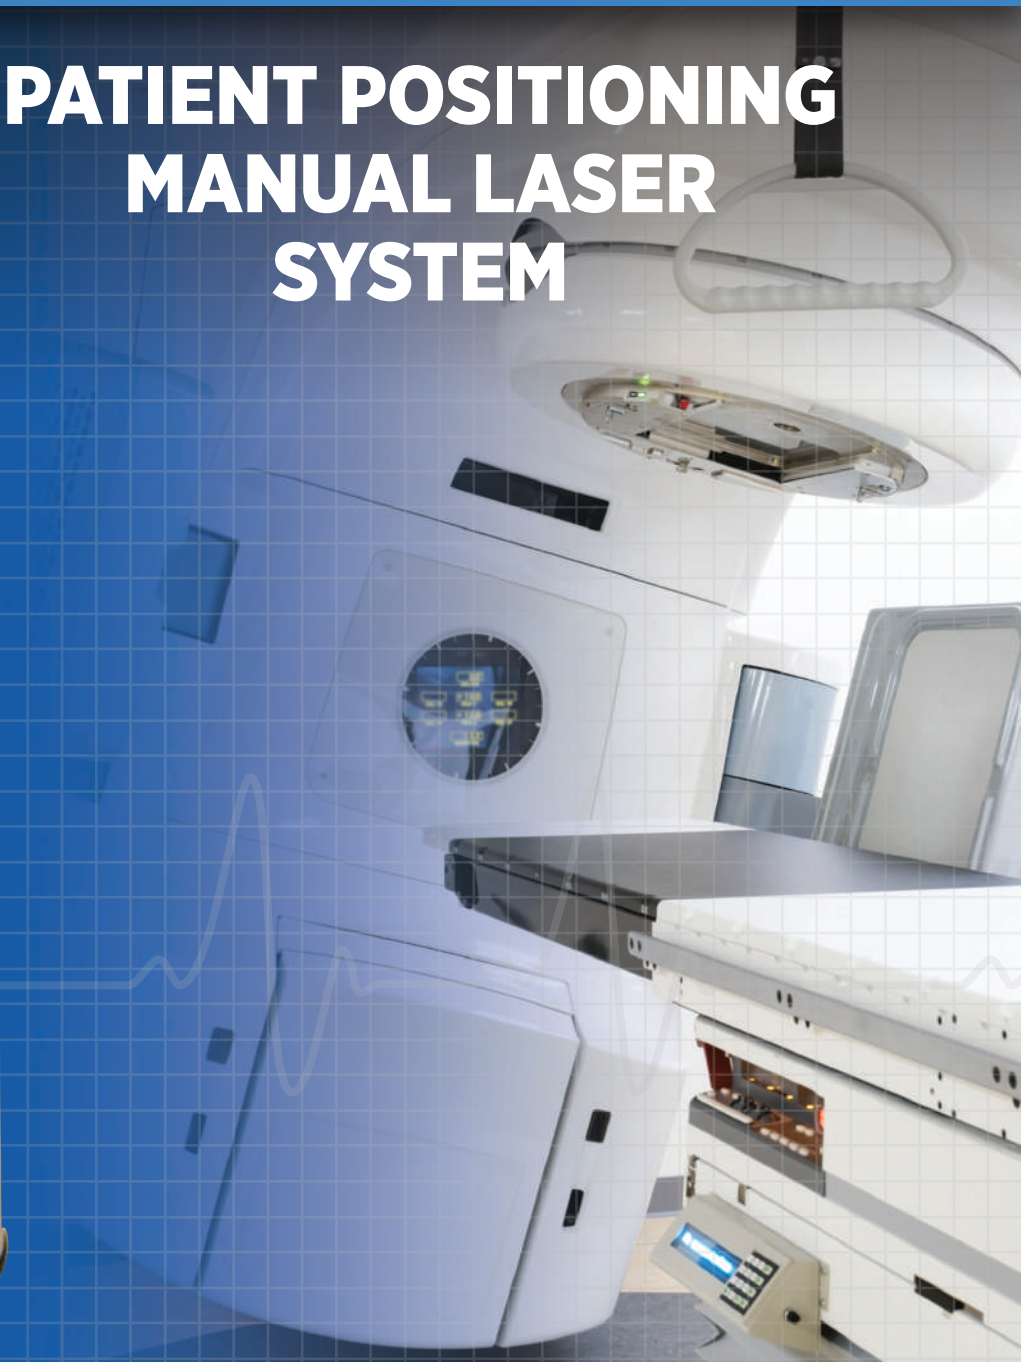

CEMARLINE



# CEMARLINE



## MAX-606

### Laser Specifications:

- 4 Axis movement:
  - X axis - Horizontal movement:  
20mm (0.8") +/-10mm (from ISO center)
  - Y axis - Vertical movement:  
20mm (0.8") +/-10mm (from ISO center)
  - Roll axis - Horizontal rotation:  
10° +/-5°
  - Pitch axis - Vertical rotation:  
6° +/-3°
- Crosshair beam rotation: 15° +/-7.5°
- Focus Adjustment: from 0.5m-6m (2'-20')
- Crosshair beam fan-out: 60° in both axis
- Available colors: red, green, and blue
- Laser Power Adjustment: 0.1mW-5mW
- Maximum line width @ 5m (16'): <1.0mm (0.04")
- Operating Temperature: 5°-28°C (40°-85°F)
- Power requirements: 100-240 VAC, 0.25A, 50-60Hz
- Dimensions:
  - Length 220mm (8.6")
  - Width 145mm (5.7")
  - Height 80mm (3.2")
- Weight: 1.6 kg (3.5 lbs)



Canada: 

**Cemar Electro Inc.**  
1370 55th Ave.  
Lachine, QC  
Canada H8T 3J8

Tel: 514-631-5807  
Fax: 514-631-7505  
Toll Free: 1-800-298-5273

[ceмар@cemarelectro.com](mailto:ceмар@cemarelectro.com)

United States: 

**Cemar Electro Inc.**  
100 Walnut St.  
Champlain, NY  
USA 12919

Tel: 518-298-3065  
Fax: 518-298-2927  
Toll Free: 1-800-298-5273

[ceмарusa@cemarelectro.com](mailto:ceмарusa@cemarelectro.com)

