

# CEMARLINE

## MAXX-700

# MAXX-700

### Laser Specifications:

- 4 Axis movement:
  - X axis - Horizontal movement: 20mm (0.8") +/-10mm (from ISO center)
  - Y axis - Vertical movement: 20mm (0.8") +/-10mm (from ISO center)
  - Roll axis - Horizontal rotation: 10° +/-5°
  - Pitch axis - Vertical rotation: 6° +/-3°
- Movement and position sensing detection for opposed lasers
- Crosshair beam rotation: 15° +/-7.5°
- Focus Adjustment: from 0.5m-6m (2'-20')
- Crosshair beam fan-out: 60° in both axis
- All displacements are precision motor driven.
- Laser Power Adjustment: 0.1mW-5mW
- Maximum line width @ 5m (16'): <0.5mm (0.02")
- Remote can control up to 5 lasers per room
- Operating Temperature: 5°-28°C (40°-85°F)
- Power requirements: 100-240 VAC, 0.25A, 50-60Hz
- Dimensions:
  - Length 210mm (8.3")
  - Width 116mm (4.5")
  - Height 94mm (3.7")
- Weight: 2.9 kg (6.4 lbs)



## PATIENT POSITIONING LASER



Canada: 

Cemar Electro Inc.  
1370 55th Ave.  
Lachine, QC  
Canada H8T 3J8

Tel: 514-631-5807  
Fax: 514-631-7505  
Toll Free: 1-800-298-5273  
cemar@cemarelectro.com

United States: 

Cemar Electro Inc.  
100 Walnut St.  
Champlain, NY  
USA 12919

Tel: 518-298-3065  
Fax: 518-298-2927  
Toll Free: 1-800-298-5273  
cemarusa@cemarelectro.com

WWW.CEMARELECTRO.COM

# CEMARLINE




## MAXX-700




- Alignment verification sensor
- Auto ambient light adjustment
- 4 Axis movement
- Precision motor drives
- Micro and macro adjustment
- Available in Green, Red, and Blue


### Remote control touch-screen adjustments:

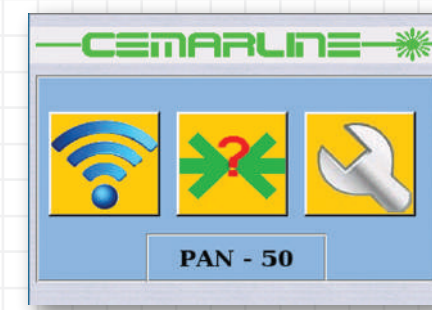

Main Menu

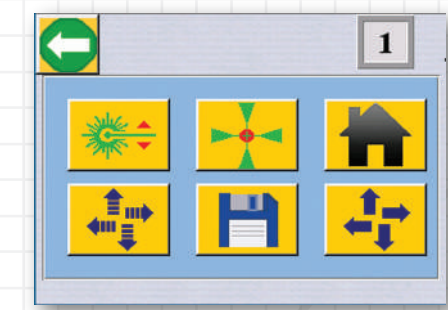


Adjustment Selection

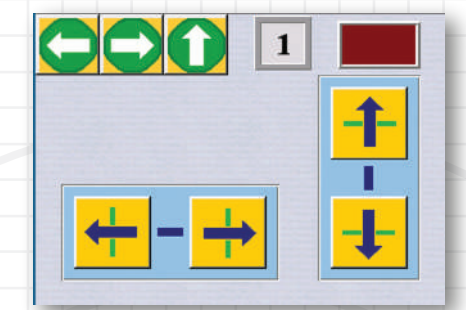

Continuous Adjustment

### Optional Mounting Bracket:

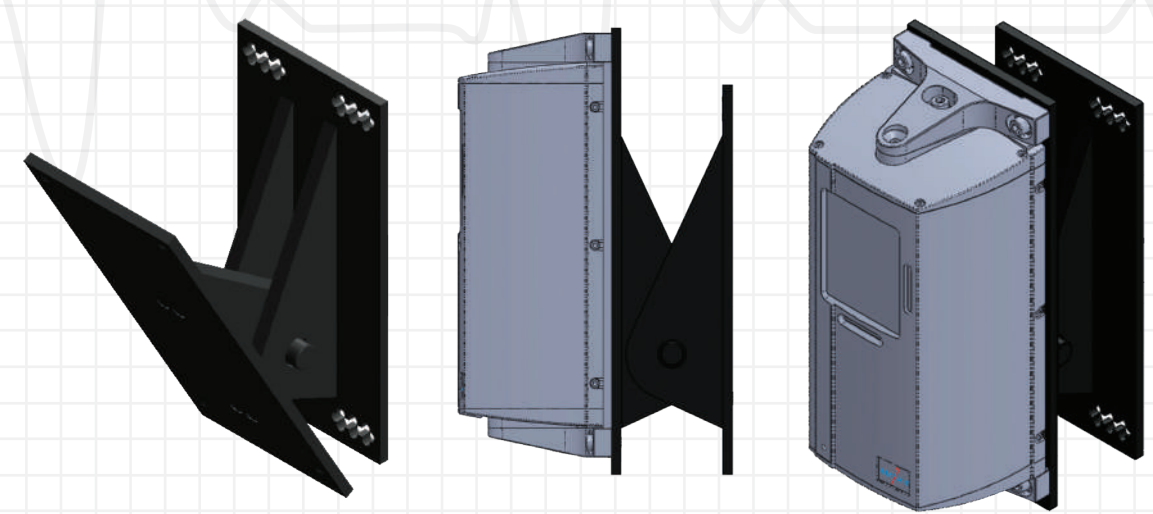

- Touch screen remote
- Full range, non-directional
- User friendly icons
- Robust ergonomic design
- RF wireless
- Full function

